



TRC Series

Features ($\phi 50\mu\text{m} \sim$)

- Due to Highly precise masking position, height of probes when installed to test fixture would be uniform. That caused high resistance.
- Smooth surface condition enables smooth installation to fixtures. That caused shorter frequently.
- We can provide high quality, durable probes in low cost

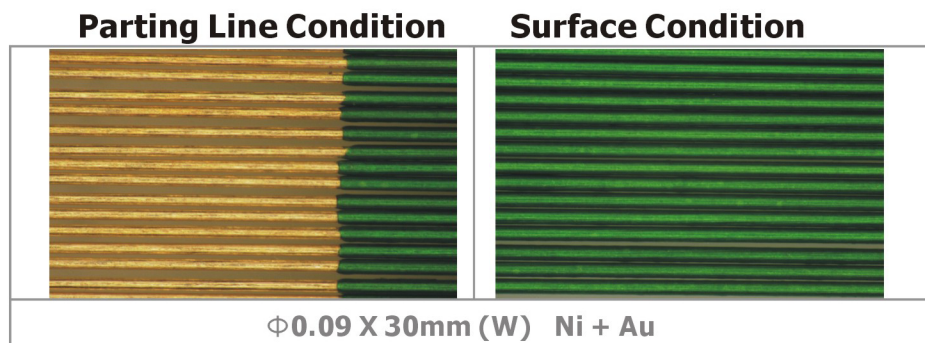

Comparison between our Electro Coating Probe and conventional Coated Probe

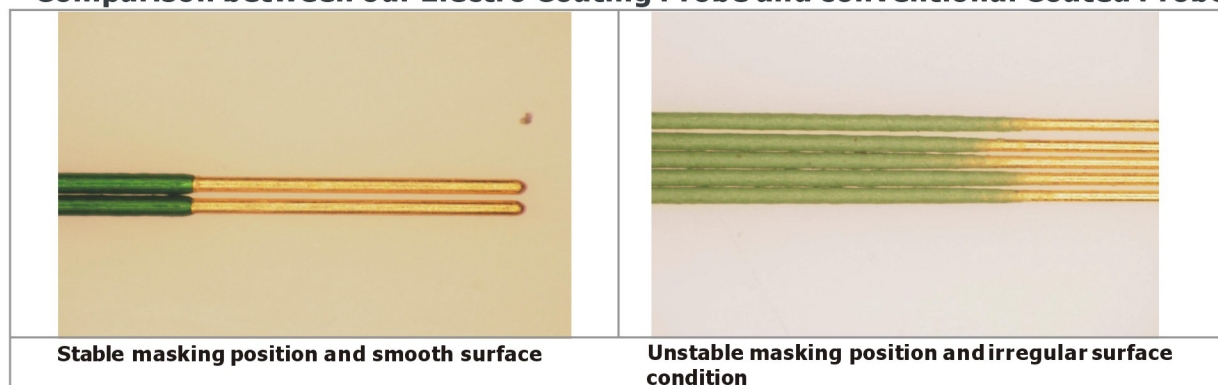

Tip configuration



How to order:

TRC – Point A – Point B – Diameter – Length