


Off-Grid Probe

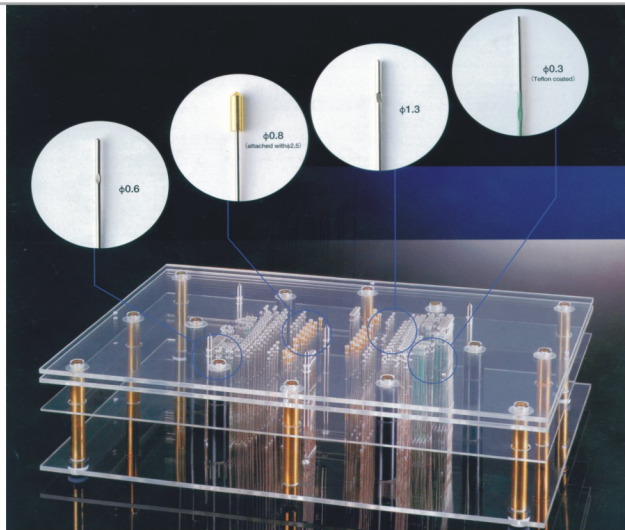

Features


- Off-grid pins $\Phi 0.1$, $\Phi 0.15$ mm for narrow pitch are available
- We will be flexible to your requirement on ordering quantity and specifications

Specifications

Material	SWP-A (music wire) PB (phosphor Bronze)
Plating	Ni-P, Ni-B, Au
Resistance	50m Ω
Voltage	3A

TRS Series

TRS-B-0.40-95.25



Tip Configurations

B Headless Spear	
B1 Ball Point	
J Headless Spherical	
F Flat	

Tip Angle


60°	
90°	

* We will be flexible to your requirements on tip angle

Diameter (Φ mm)	Length (mm)
0.10	L=36/ L=43.2/ L=50.8/ L=58/ L=95.25 etc.
0.15	
0.20	
0.25	
0.30	
0.35	
0.40	
0.50	
0.80	
1.00	
1.30	

Specifications

- Material: SWP-A (Music wire), PB (Phosphor Bronze)
- Plating: Ni+P, Ni+B, Au
Plating thickness: $\sim 2\mu\text{m}$
- Coating: Teflon or Deflic
Coating Thickness: 30~40 μm

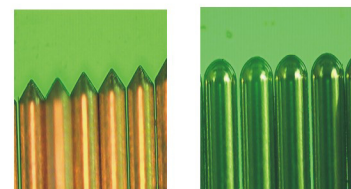

How to Order: TRS- **Tip configuration** - **Diameter** - **Length**