



TGK-2 Series Miniature, low profile spring contact, supplied moulded in an array. Perpendicular or flat mounting

TYPE 1 Fitment method. PCB to PCB contact array, no lugs

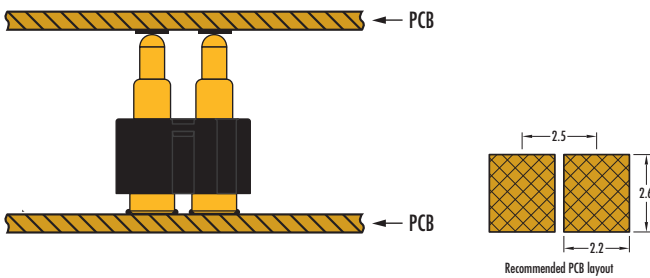

- Can be supplied with protective caps fitted to allow automatic pick and placement

Radius tipstyle

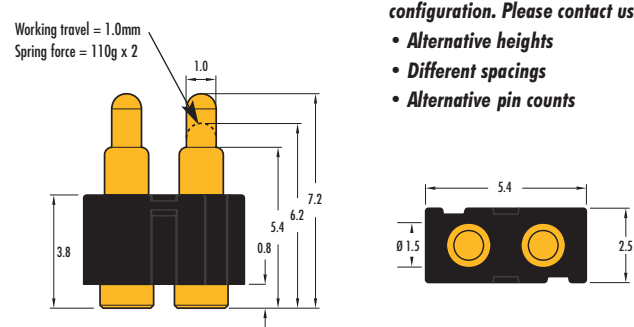


TGK-2J-7.2-2F

This array shows an example configuration. Please contact us for:


- Alternative heights
- Different spacings
- Alternative pin counts

TYPE 2 Fitment method. PCB to PCB 4 contact array, with lugs

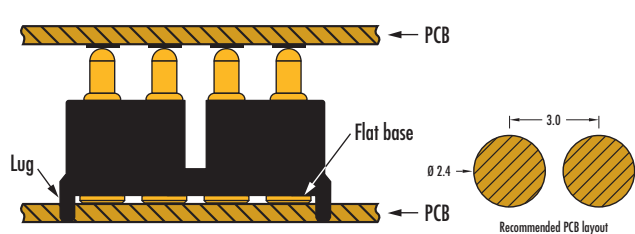

- Fitted with lugs for PCB alignment
- Can be supplied with protective caps fitted to allow automatic pick and placement
- Available with 1 to 12 spring contacts
- Available with different pitch

Radius tipstyle

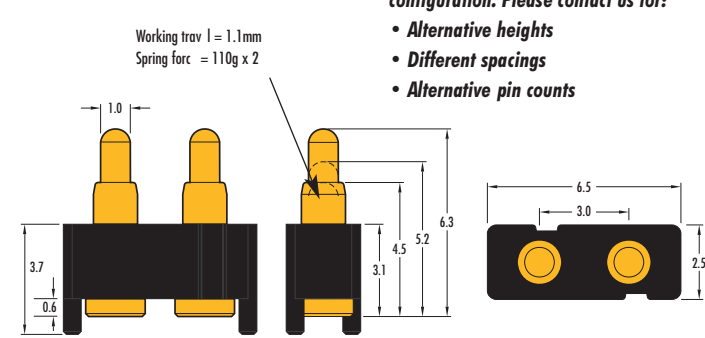


TGK-2J-6.3-FL

This array shows an example configuration. Please contact us for:


- Alternative heights
- Different spacings
- Alternative pin counts

TYPE 3 Fitment method. PCB to PCB contact array, tail, lugs

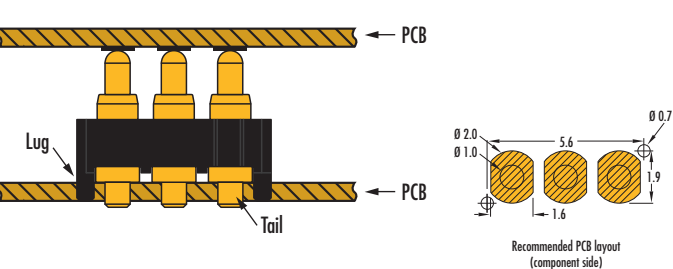

- Fitted with lugs for PCB alignment
- Spring contact has tail on barrel to aid positioning and to solder in with
- Can be supplied with protective caps fitted to allow automatic pick and placement

Radius tipstyle

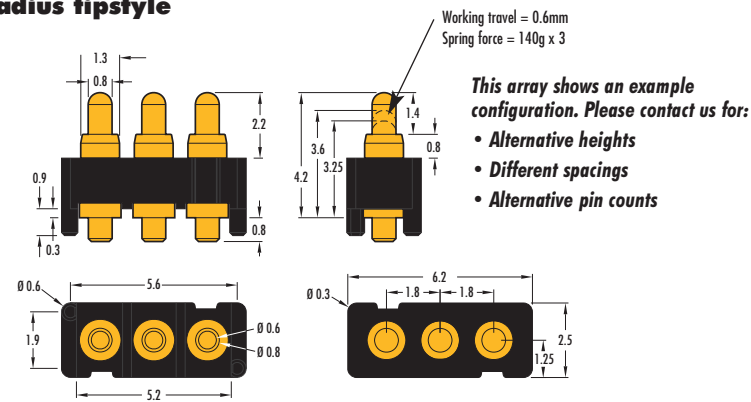


TGK-2J-4.2-3TL

This array shows an example configuration. Please contact us for:


- Alternative heights
- Different spacings
- Alternative pin counts

TYPE 4 Fitment method. PCB to battery contact array, right-angle, lugs

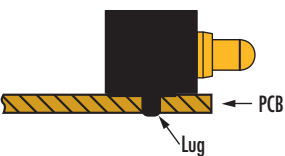

- Fitted with lugs for PCB alignment
- Flat base to each contact for soldering
- Ideal for products which are super-thin

Radius tipstyle

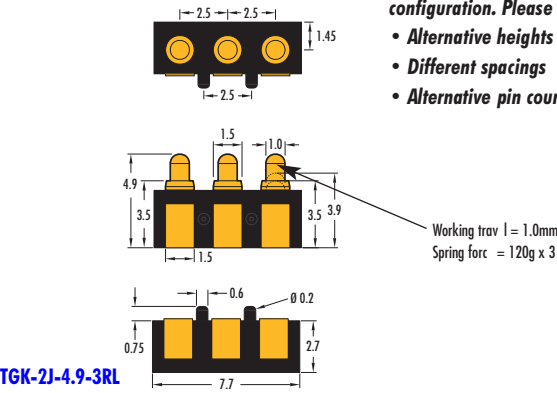

TGK-2J-4.9-3RL

This array shows an example configuration. Please contact us for:

- Alternative heights
- Different spacings
- Alternative pin counts