




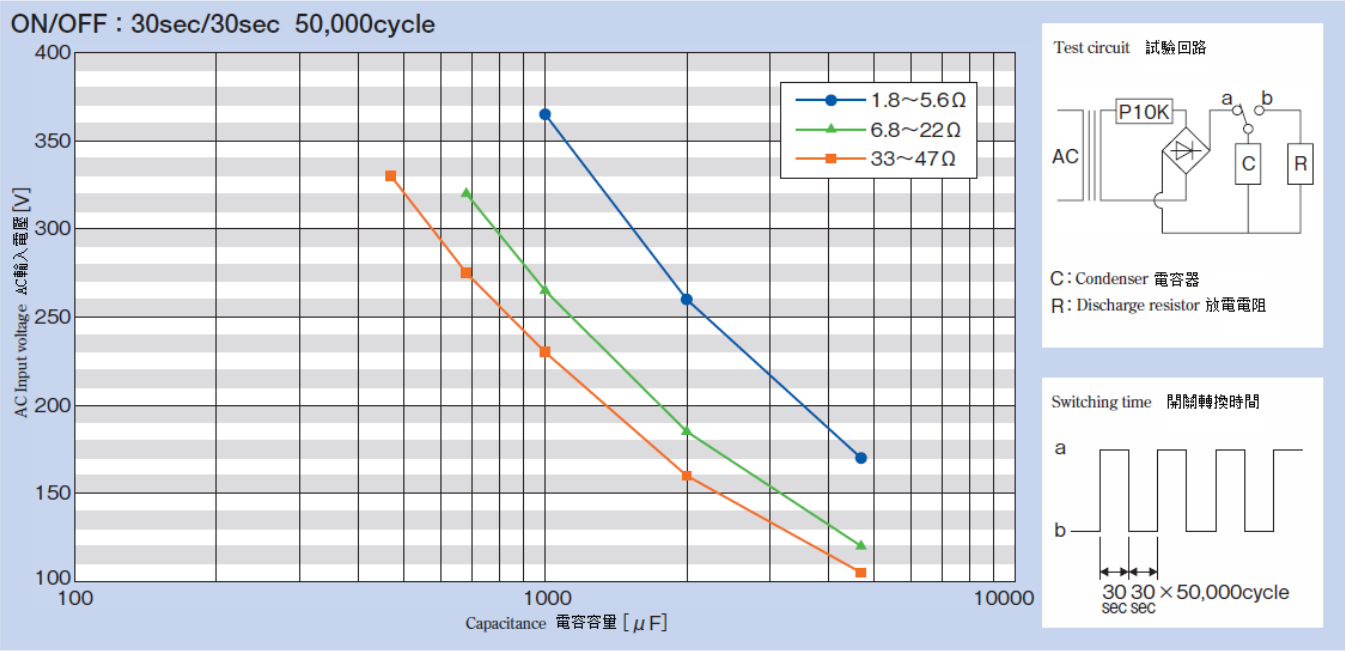

Derating Curve 降低負荷曲線

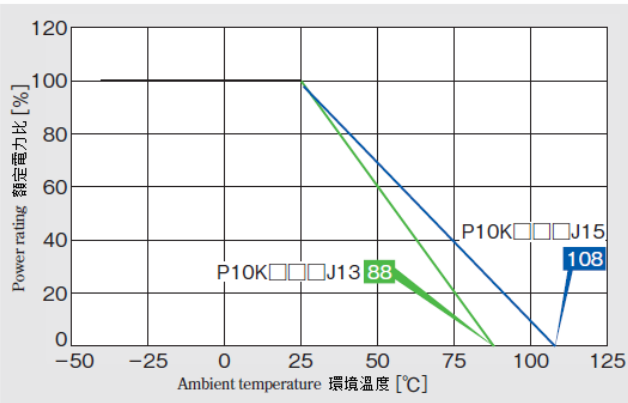


Interception Time vs. Wattage 切斷性能

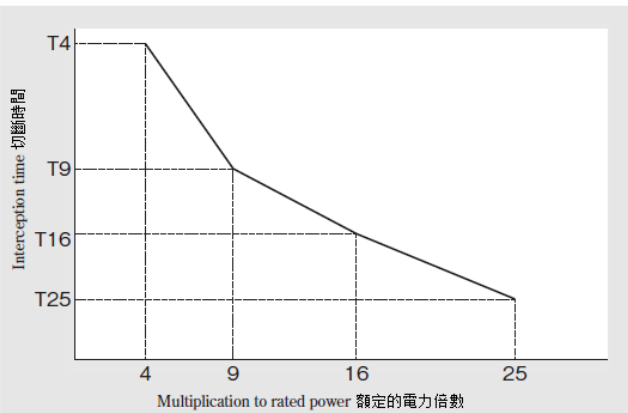

Interception time—max sec. 切斷時間 (秒以內)			
T4	T9	T16	T25
1 hour or less 1 小時以內	90	55	40

Interception Characteristics 切斷特性

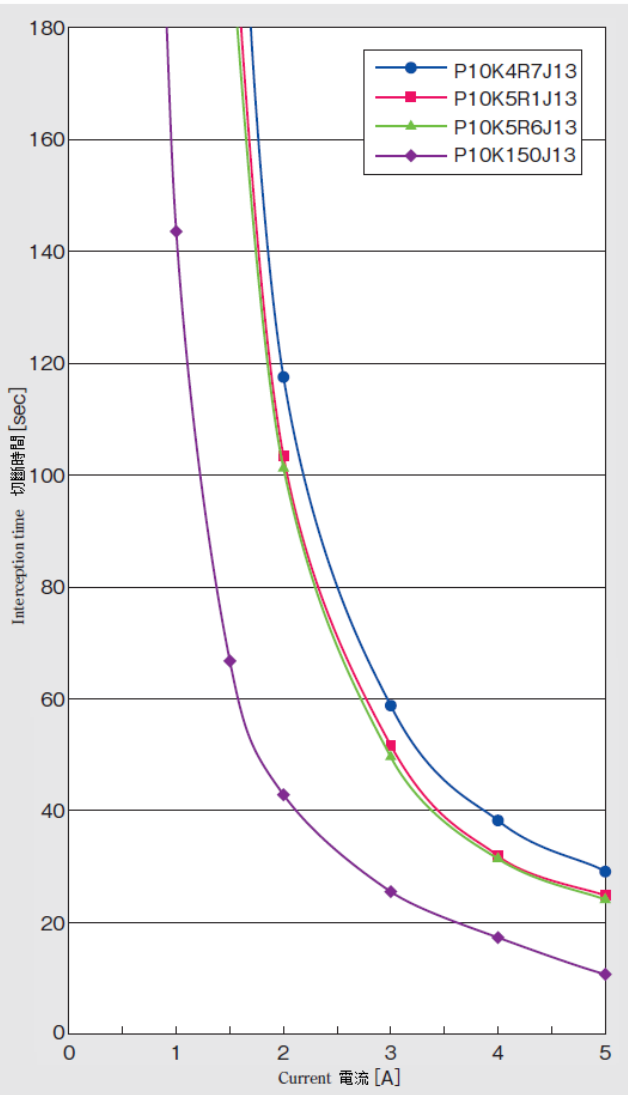

Performance 其他性能

Test Characteristics 切斷時間 (秒以內)	Test Methods 試驗方法		Specifications 規格									
Resistance value 電阻值	The following DC voltage is applied across lead terminals for measurements. 導線端子間施加下表的直流電壓進行測定。		Resistance shall be within ±5% of nominal resistance value. 在±5%以內									
	<table><tr><th colspan="2">Nominal resistance range 額定電阻值範圍</th><th>Max. applied Voltage 最高承受電壓</th></tr><tr><td>1 and over 1 以上</td><td>less than 10 10 未滿</td><td>0.3</td></tr><tr><td>10 and over 10 以上</td><td>less than 100 100 未滿</td><td>1</td></tr></table>			Nominal resistance range 額定電阻值範圍		Max. applied Voltage 最高承受電壓	1 and over 1 以上	less than 10 10 未滿	0.3	10 and over 10 以上	less than 100 100 未滿	1
	Nominal resistance range 額定電阻值範圍			Max. applied Voltage 最高承受電壓								
	1 and over 1 以上	less than 10 10 未滿		0.3								
10 and over 10 以上	less than 100 100 未滿	1										
Functioning temperature 動作溫度	Soaking the product in the oil bath of temperature rising at 0.5/per min. Then measure the temperature of oil. The measure beginning temperature is -20°C of rated functioning temperature, and the detection current is assumed to be 10mA or less. 製品在每分鐘 0.5°C 的油槽中，製品動作時由槽內溫度的測定。 測定開始定額溫度為 -20°C，檢測電流在 10mA 以下。		P10K□□□J13: 133+0-7°C P10K□□□J15: 157+0-7°C									
Insulation resistance 絕緣電阻	Between body and lead terminals 主體、導線端子間	DC500V is impressed and measured between metallic foil wrapped on the case, and lead terminals. 在水泥殼上的金屬箔與導線端子間施加 DC500V 進行測定。	Insulation resistance shall be 1000MΩ or above. 在 1000MΩ以上									
	Between body lead terminals 兩根導線端子間	DC500V is impressed for and measured between lead terminals after functioning temperature test. 動作溫度試驗後，導線端子間施加 DC500V 進行測定。	Insulation resistance shall be 0.2MΩ or above. 在 0.2MΩ以上									
Dielectric strength 耐電壓	Between body and lead terminals 主體、導線端子間	AC1.5kV is impressed for 1 minute and measured between metallic foil wrapped on the case, and lead terminals. (Cutoff current 0.5mA) 在水泥殼上的金屬箔與導線端子間施加 AC1.5kV 進行 1 分鐘測定。(檢測電流 0.5mA)	The products shall withstand for 1 minute. 能承受 1 分鐘									
	Between body lead terminals 兩根導線端子間	AC500V is impressed for 1 minute and measured between lead terminals after functioning temperature test. (Cutoff current 0.5mA) 動作溫度試驗後，導線端子間施加 AC500V 進行 1 分鐘測定。(檢測電流 0.5mA)	The products shall withstand for 1minute. 能承受 1 分鐘									
Temperature coefficient of resistance 電阻溫度系數	Room temperature / 70°C up 室溫 / 70°C 以上		±250ppm/°C									
Short time overload 短時間過負荷	Rated power x 10, for 5 sec. 額定電力×10 倍，承受 5 秒鐘		±(2%+0.05Ω)									
Soldering heatproof 焊接耐熱性	265°C± 5°C, 10 sec.		±(1%+0.05Ω)									
Terminal strength 端子強度	Pull: 20N, 1 min. Bending: 90°C, 1 cycle 拉力：20N，1 分鐘 扭曲：90°C，1 週期		No mechanical damages 無斷線、鬆動、破損									
Humidity resistance 耐濕性	40°C, Humidity 90~95%RH, 10000 hours 40°C，濕度 90~95%RH，10000 小時		±(2%+0.05Ω)									
Load life 負荷壽命特性	Rating load 1000 hours, 1.5 hours ON / 0.5 hours OFF cycle 額定負荷 1000 小時，1.5 小時開/0.5 小時關的週期		±(3%+0.05Ω)									