


Fine Pitch Probes

TRX-B-02-S-81

Φ0.2mm (applicable for 0.3mm)
Φ0.3mm (applicable for 0.5mm)



Tip Configuration

B Headless Spear



J Headless Spherical



B1 Ball Point



F Flat




N Three-needle

*available only Φ0.3mm




Socket


D1



D2



D3



Available for terminals


Socket (lead 500mm and others)	Terminal
D1	Q, W
D2	S, P
D3	Q, W, Z

Terminal & Socket Specifications


Material	Phosphor Bronze
Plating	Ni + Au
Fixture	Solder (between probe & terminal)
	Insert (between terminal & socket)

Terminal


S

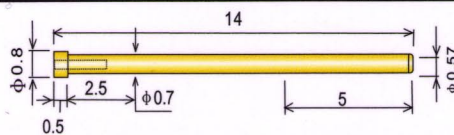


Q




W

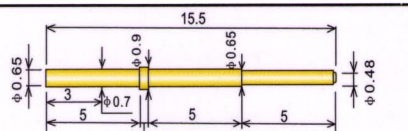

P

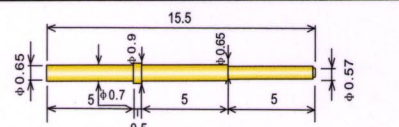

Z

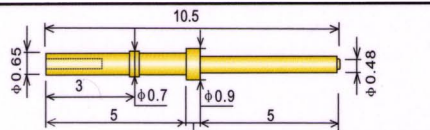

Probe Specifications

Material	SKH
Plating	Ni + Au
Insulation	Fluoric Polymer Coating

How to Order:

TRX- **Tip configuration** - **Diameter** - **terminal** - **length**